



HAMPO-USB-0606-V1.0

2MP AR0230 Fixed Focus USB 2.0 Camera Module



Hampo 003-0606 is a 1080P full HD USB 2.0 camera module featuring on Wide Dynamic Range (WDR) and night vision IR-Cut(which could auto switch day and night modes), widely used for security camera, access control system, face recognition system etc.

The camera is based on 1/2.7" AR0230 CMOS image sensor with advance 3.0 μ m pixel BSI technology from ON Semiconductor. It has S-mount (M12) lens holder which allows customers to choose and use the lens according to their requirement. The max wide dynamic range up to 96dB.

Key Features

- Day/Night Vision: Embedded removable IR-CUT filter, eliminating color distortion in the daylight.
- 1080P HD Resolution: High precision and high quality pictures!
- 1/2.7" AR0230 Image Sensor: Adopting Aptina AR0230 CMOS sensor, feature at wide dynamic range and high quality image under the backlight.
- Plug&Play: Support Windows XP/7/8/10, Linux, Mac OS and Andriod device with UVC, just connect the camera to PC, laptop with the USB cable without extra drivers to be installed.



HAMPO-USB-0606-V1.0

2MP AR0230 Fixed Focus USB 2.0 Camera Module

Camera Module No.	HAMPO-USB-0606-V1.0
Resolution	2MP
Image Sensor	AR0230
Sensor Type	1/2.7"
Pixel Size	3.0 um x 3.0 um
EFL	1.70 mm
F.NO	1.20
Pixel	1920 x 1080
View Angle	96°(DFOV) 85°(HFOV) 50°(VFOV)
Lens TTL	14.78mm
Module Type	Fixed Focus
Lens Model	HAMPO-LENS-9040-674-1
Interface	USB 2.0
Output Format	MJPEG / YUV
Auto Control	Saturation, Contrast, Acutance White Balance, Exposure
Audio	Digital Mic
Input Voltage	DC 5V
Working Current	Max 500mA
PCB Size	38mm x 38mm
System Compatibility	Windows XP (SP2, SP3), Vista, 7, 8, 10, 11 Android, Mac OS, Linux or OS with UVC Driver Raspberry Pi by USB Port
Software for USB Camera	AMCAP, Webcam Viewer, V4L2 Controls Contacam, VLC Player, MotionEye OS iSpy, ZoneMider, Yawcam
Lens Type	650nm IR Cut
Operating Temperature	-20°C to +70°C
USB Cable	USB-Cable-U015

Wide Compatibility with Windows, Android, Mac OS, Linux, or Raspberry Pi



Raspberry Pi



HAMPO-USB-0606-V1.0
2MP AR0230 Fixed Focus USB 2.0 Camera Module



Top View



Side View



Bottom View



Mating Connector

RoHS

Lens parameter:2G2P

EFL:3.2

F.NO:2.5

View Angle:D96°H85° V50°


Distortion:<-8%

Chip Type:1/2.7"

Array Size:2MP

Lens Size:14mm


TOP VIEW

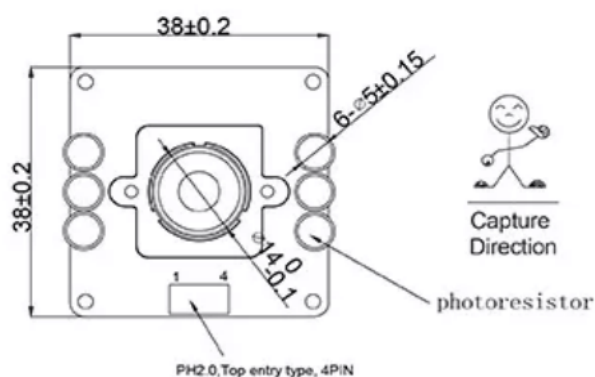


PH2.0, Top entry type, 4PIN

PIN4	DGND
PIN3	DP
PIN2	DM
PIN1	USB5V

BOTTOM VIEW

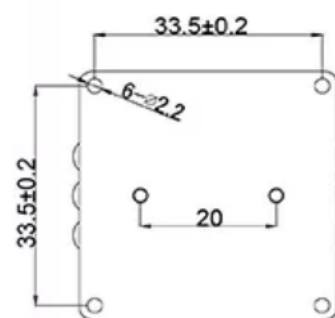

SIDE VIEW

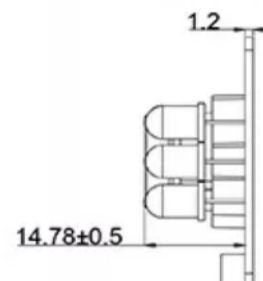

NOTE

- 1.The unmarked tolerance of linear dimension is $\pm 0.1\text{mm}$
- 2.Sensor :AR0230

UNSPECIFIED TOL:		SIGNATURE		DATE		R & D Center		DONGGUAN HAMPO ELECTRONIC TECHNOLOGY CO.,LTD	
.XXX	± 0.005	DWN.BY	ALLEN	2022.04.18		PART NAME		USB Camera	
.XX	± 0.05	CHK.BY				DWG NO		2.03.0606.011-PCBA	
.X	± 0.1	APP.BY				SCALE		UNIT	
∠	$\pm 0.5^\circ$	MATERIAL	/			SHEET		SIZE	
		TREATMENT	/			1:1		mm	
						1/1		A4	
								PART NO.	
								/	

PRODUCT NAME : 9040-674-1


1. SPECIFICATION :

- 1.SENSOR SIZE
2.WAVELENGTH
3.FOCAL LENGTH (EFL)
4.F/NO (INFINITE)
5.BACK FOCAL LENGTH
6.FLANGE BACK LENGTH
7.FIELD OF VIEW (DIAGONAL)
8.OPTICAL DISTORTION (DIAGONAL)
9.Thread Size
10.Element
11.IR FILTER SPEC.(Built-in,Others available)
Tavg>=88% @ 440-620 nm
T=50% @ 648±10 nm
Tavg<=3% @ 700-1000 nm
T<5% @ 1050 nm

2. OPTICAL LAYOUT :
12.The lens can not through the UV lamp test.

scale 4 : 1

2710
 $\lambda = 400-700\text{nm}(\text{COLOR})$
 $f = 3.2 \text{ mm}$
 $F/NO = 2.5$
 $BFL = 5.15 \text{ mm}$
 $FB = 4.52 \text{ mm}$
 $D = 96^\circ \quad H = 85^\circ$
 $< -8\%$
 $M12XP0.5$
 $2P2G$

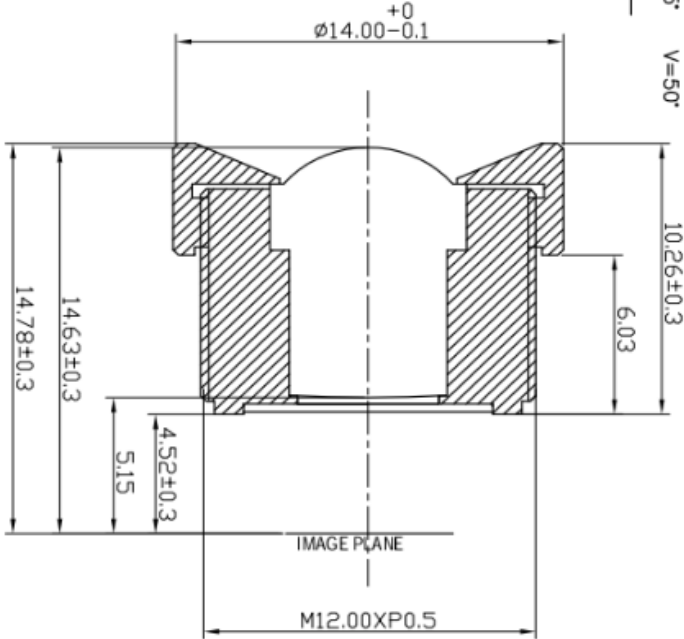

REV	DESCRIPTION	DATE	NAME	NAME	9040-674-1	SCALE	4:1	DRAWN
①				VIEW	REV	DATE	2013.06.05	CHECKED
②					OO	BORDER	A4	APPROVED
③								
④								

1/2.7-Inch 2.1 Mp/Full HD Digital Image Sensor

AR0230CS Datasheet, Rev. 8

For the latest datasheet, please visit www.onsemi.com

Features

- Superior low-light performance
- Latest 3.0 μm pixel with ON Semiconductor DR-Pix™ technology with Dual Conversion Gain
- Full HD support at up to 1080P 60 fps for superior video performance
- Linear or high dynamic range capture
- Optional adaptive local tone mapping (ALTM)
- Pixel or Line interleaved T1/T2 output
- Support for external mechanical shutter
- On-chip phase-locked loop (PLL) oscillator
- Integrated position-based color and lens shading correction
- Slave mode for precise frame-rate control
- Stereo/3D camera support
- Statistics engine
- Data interfaces: four-lane serial high-speed pixel interface (HiSPi) differential signaling (SLVS and HiVCM), or parallel
- Auto black level calibration
- High-speed configurable context switching
- Temperature sensor

Applications

- Video surveillance
- 1080p60 (Surveillance) video applications
- High dynamic range imaging

General Description

ON Semiconductor's AR0230CS is a 1/2.7-inch CMOS digital image sensor with an active-pixel array of 1928Hx1088V. It captures images in either linear or high dynamic range modes, with a rolling-shutter readout. It includes sophisticated camera functions such as in-pixel binning, windowing and both video and single frame modes. It is designed for both low light and high dynamic range scene performance. It is programmable through a simple two-wire serial interface. The AR0230CS produces extraordinarily clear, sharp digital pictures, and its ability to capture both

continuous video and single frames makes it the perfect choice for a wide range of applications, including surveillance and HD video.

Table 1: Key Parameters

Parameter		Typical Value
Optical format		1/2.7-inch (6.6 mm)
Active pixels		1928(H) x 1088(V) (16:9 mode)
Pixel size		3.0 μm x 3.0 μm
Color filter array		RGB Bayer
Shutter type		Electronic rolling shutter and GRR
Input clock range		6 – 48 MHz
Output clock maximum		148.5 Mp/s (4-lane HiSPi) 74.25 Mp/s (Parallel)
Output	Serial	HiSPi 10-, 12-, 14-, 16-, or 20-bit
	Parallel	10-, 12-bit
Frame rate	1080p	60 fps
Responsivity		4.0 V/lux-sec
SNR _{MAX}		41 dB
Max Dynamic range		Up to 96 dB
Supply voltage	I/O	1.8 or 2.8 V
	Digital	1.8 V
	Analog	2.8 V
	HiSPi	0.3 V - 0.6 V (SLVS), 1.7 V - 1.9 V (HiVcm)
Power consumption (typical)		386 mW (Linear, 1080p30, 25C, parallel output) 558 mW (HDR, 1080p30, 25C, parallel output)
Operating temperature		–30°C to +85°C ambient
Package options		10x10 mm 80-pin iBGA



Camera Reliability Test

Reliability Inspection Item			Testing Method	Acceptance Criteria
Category		Item		
Environmental	Storage Temperature	High 60°C 96 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 96 Hours	Temperature Chamber	No Abnormal Situation
	Operation Temperature	High 60°C 24 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 24 Hours	Temperature Chamber	No Abnormal Situation
	Humidity	60°C 80% 24 Hours	Temperature Chamber	No Abnormal Situation
	Thermal Shock	High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours	Temperature Chamber	No Abnormal Situation
Physical	Drop Test (Free Falling)	Without Package 60cm	10 Times on Wood Floor	Electrically Functional
		With Package 60cm	10 Times on Wood Floor	Electrically Functional
	Vibration Test	50Hz X-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Y-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Z-Axis 2mm 30min	Vibration Table	Electrically Functional
	Cable Tensile Strength Test	Loading Weight 4 kg 60 Seconds Cycling in 24 Hours	Tensile Testing Machine	Electrically Functional
Electrical	ESD Test	Contact Discharge 2 KV	ESD Testing Machine	Electrically Functional
		Air Discharge 4 KV	ESD Testing Machine	Electrically Functional
	Aging Test	On/Off 30 Seconds Cycling in 24 Hours	Power Switch	Electrically Functional
	USB Connector	On/Off 250 Times	Plug and Unplug	Electrically Functional





Camera Inspection Standard

Inspection Item		Inspection Method	Standard of Inspection
Category	Item		
Appearance	FPC/ PCB	Color	Major Difference is Not Allowed.
		Be Torn/Chopped	Copper Crack Exposure is Not Allowed.
		Marking	Clear, Recognizable (Within 30cm Distance)
	Holder	Scratches	The Inside Crack Exposure is Not Allowed
		Gap	Meet the Height Standard
		Screw	Make Sure Screws Are Presented (If Any)
		Damage	The Inside Crack Exposure is Not Allowed
	Lens	Scratch	No Effect On Resolution Standard
		Contamination	No Effect On Resolution Standard
		Oil Film	No Effect On Resolution Standard
		Cover Tape	No Issue On Appearance.
Function	Image	No Communication	Test Board Not Allowed
		Bright Pixel	Black Board Not Allowed In the Image Center
		Dark Pixel	White board Not Allowed In the Image Center
		Blurry	The Naked Eye Not Allowed
		No Image	The Naked Eye Not Allowed
		Vertical Line	The Naked Eye Not Allowed
		Horizontal Line	The Naked Eye Not Allowed
		Light Leakage	The Naked Eye Not Allowed
		Blinking Image	The Naked Eye Not Allowed
		Bruise	Inspection Jig Not Allowed
		Resolution	Chart Follows Outgoing Inspection Chart Standard
		Color	The Naked Eye No Issue
		Noise	The Naked Eye Not Allowed
		Corner Dark	The Naked Eye Less Than 100px By 100px
		Color Resolution	The Naked Eye No Issue
Dimension		Height	The Naked Eye Follows Approval Data Sheet
		Width	The Naked Eye Follows Approval Data Sheet
		Length	The Naked Eye Follows Approval Data Sheet
		Overall	The Naked Eye Follows Approval Data Sheet

Dongguan Hampo Electronic Technology Co., Ltd.
 Address No. 58, New Arising Industrial Zone,
 Tangxia Town, Dongguan, Guangdong, China

Web www.HampoTech.com
E-mail
Fairy@hampotech.com
Ella@hampotech.com

Tel (+86) 769 8798 9852
Fax (+86) 879 8798 9853
Mobile (+86) 158 1867 7270

Skype FairyTan
WeChat (+86) 15818677270
WhatsApp (+86) 15818677270



Company HAMPO

Dongguan Hampo Electronic Technology Co., Ltd. was established in 2015, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. Hampo is occupying 150,000 square feet automated plants with 500 employees of annual throughput 180,000,000 units cameras.

Hampo provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. Hampo specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.



Limited Warranty

Hampo provides the following limited warranty if you purchased the Product(s) directly from Hampo company or from Hampo's website, www.hampotech.com. Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. Hampo guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, Hampo will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of Hampo is solely limited to repair and/or replacement on the terms set forth above. Hampo is not reliable or responsible for any subsequent events.

