



**HAMPO-003-0663**



**2MP RXS2719 Fixed Focus**

**Dual Lens Stereo USB 2.0 Camera Module**


### Product Description

HAMPO 003-0663 is a a synchronized dual lens USB camera module, with two pieces 1/2,7" CMOS RXS2719 image sensor, the max resolution is 1920\*1080P @30fps for each camera.

It delivers high-speed, 2K resolution ultra-sharp image. There are two DSP chipset controls each sensor, so the two cameras are working separately. This 3D stereo camera module is widely used for 3D depth mapping, virtual reality (VR), augmented reality (AR), mixed reality (MR), extended reality (XR), face detection, automotive, robotics, machine vision, and biometric intelligence.

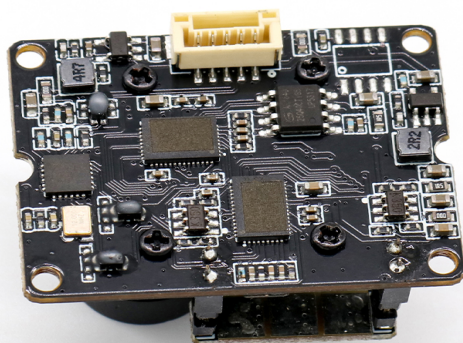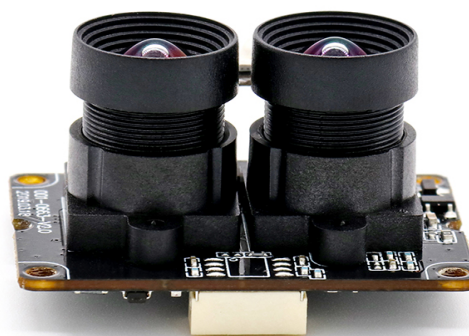

*FOV:  $D=65^{\circ}$   
EFL: 5mm  
F/NO: 2.4  
Optical length: 14.2mm*



*USB2.0-5pin-1.25*

*Size:  
Length: 38mm  
Width: 28mm*

**Wide Compatibility with Windows, Android, Mac OS, Linux, or Raspberry Pi**





## Key Features

1. Synchronized dual lens camera module
2. Full HD 1080P Resolution
3. Best Universal Compatibility: Dual lens camera module support USB 2.0 OTG, plug&play.
4. Wide Application: widely used for deep vision detection scenarios, such as face recognition, access control system, robot vision, VR, biometric Retina analyze, 3D measurement, Intelligent transportation system, People Counting & Tracking etc.



Items	Parameters	
	IR Camera	Color Camera
SENSOR	RXS2719	RXS2719
Lens Size	1/2.7 inch	1/2.7 inch
Maximum Effective resolution	2 millions	2 millions
Pixel Size	1920*1080	1920*1080
Data Format	MJPEG/YUY2	MJPEG/YUY2
Dynamic Range	76dB	76dB
Lens	FOV : D= 65°	FOV : D= 65°
	filter: 850nm	filter: 650nm
	lens construction: 2G3P	lens construction: 2G3P
	mount : M12*P0.5mm	mount : M12*P0.5mm
Focusing	Fixed focus	
Frame Rate	30fps	
Auto Control	Brightness/Contrast/Color saturation/Hue/Definition/Gamma /White balance/Exposure	
Voltage	DC 5V	
Working Current	MAX 200mA	
USB Connector	USB2.0	
Storage Temperature	-20℃ to +70℃	
Working Temperature	0℃ to +60℃	
System Compatibility	1、 Windows XP (SP2,SP3) 、 Vista 、 7、 8、 10	
	2、 Linux or OS with UVC driver	

Wide Compatibility with Windows, Android, Mac OS, Linux, or Raspberry Pi



Lens parameter:2G3P+IR650

TOP VIEW

BOTTOM VIEW

EFL:5.0±5%mm

F.NO:2.4±5%



View Angle:D65° H52° V39°

Distortion:<-0.94%



Chip Type:1/2.7"

Array Size:2MP

Thread Size:M12\*P0.5

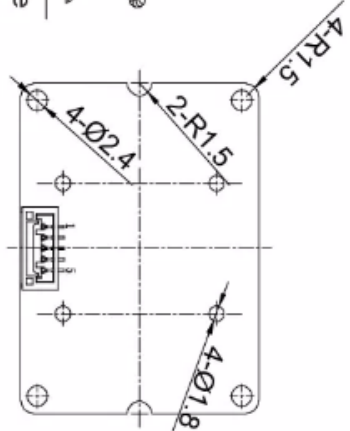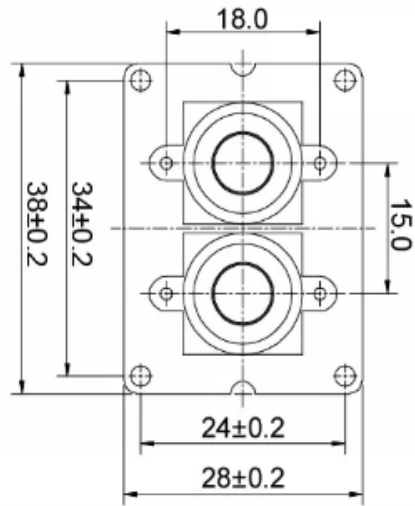

SIDE VIEW

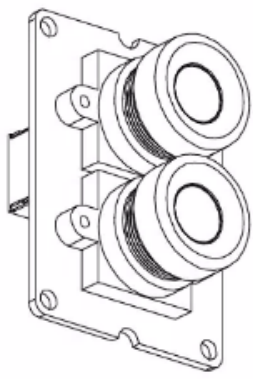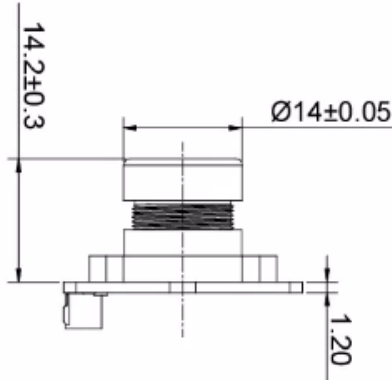

PH11 25, Top entry type, 5PIN

Earth	GRD	U+	U-	SV
PIN5	PIN4	PIN3	PIN2	PIN1

NOTE  
Sensor :RXS2719B-Specification-CSP5\_Version-1-04\_  
Realtek.


UNSPECIFIED TOL.			SIGNATURE		DATE		R & D Center		DONGGUAN HAMPO ELECTRONIC TECHNOLOGY CO.,LTD			
XXX	±	0.005	DWN.BY	MIKE	2022.06.06		PART NAME	USB Camera				
XX	±	0.05	CHK.BY				DWG NO	2.03.0663.0222				
X	±	0.1	APP.BY	/			UNIT	SHEET	SIZE	PART NO.		
∠	±	0.5°	MATERIAL	/			SCALE	1:1	mm	1/1	A4	/
			TREATMENT	/								


## 1. SPECIFICATION:

- |  |                 |
|--|-----------------|
| 1.RESOLUTION                                 | 2M              |
| 2.MAX IMAGE CIRCLE                           | ø6.60 mm        |
| 3.FOCAL LENGTH (EFL)                         | f=5.00±5% mm    |
| 4.F/NO (INFINITE)                            | F/NO=2.4±5%     |
| 5.BACK FOCAL LENGTH                          | BFL=2.78±0.2 mm |
| 6.FLANGE BACK LENGTH                         | FB=1.43±0.2 mm  |
| 7.Thread Size                                | M12*P0.5        |
| 8.Element                                    | 2G3P+IR650      |
| 9.IR FILTER SPEC.(Built-in,Others available) |                 |
| Tavg>=90% @ 440-620 nm                       |                 |
| T=50% @ 650±10 nm                            |                 |
| Tavg<=3% @ 700-1000 nm                       |                 |
| T<5% @ 1050 nm                               |                 |

NOTE	SPECIFICATION	
Sensor	1/2.8"	
FOV	Vertical	39°
	Horizontal	52°
	Diagonal	65°
TV-DISTORTION	<-0.94%	
Relative Ill.	>37%	
CRA	<15.8°	

## 2. OPTICAL LAYOUT:

REV	DESCRIPTION	DATE	NAME	5019-A1			SCALE	DRAWN	
①	新規作成	2018.11.12		VIEW		REV	00		
②								DATE	CHECKED
③									
④									

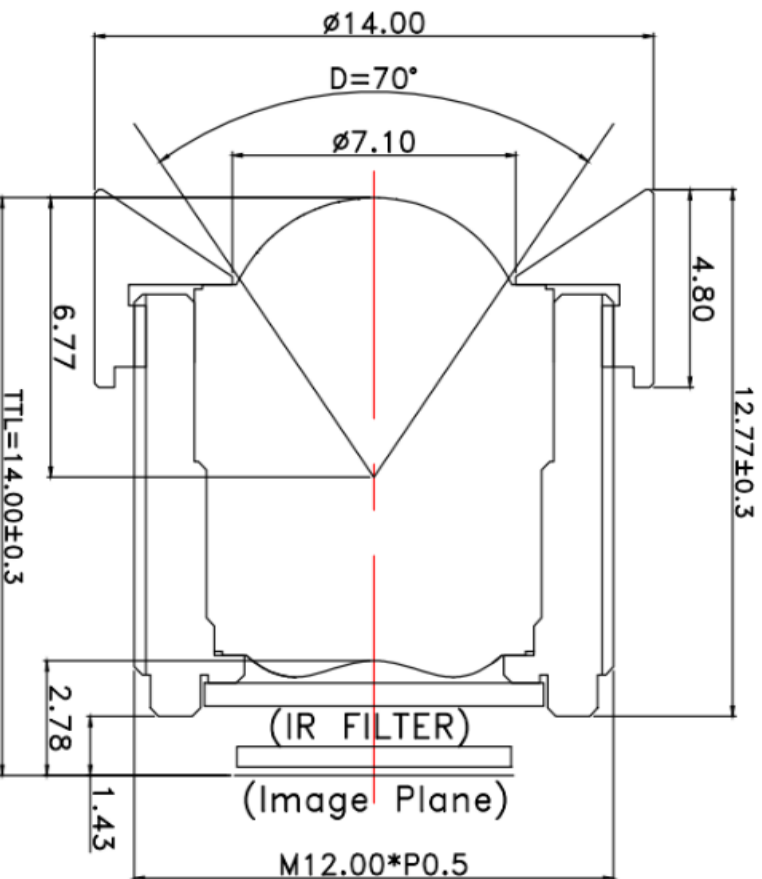

**Copyright©2017 OmniVision Technologies, Inc. All rights reserved.**

High quality RXS2719 is a 1/2.7 inch 1080p format CMOS image sensor. It provides high quality digital images and high-definition (HD) video. RXS2719 focuses on products including Security Surveillance systems, IP cameras and HD analog cameras.

By introducing advanced 3um pixel architecture, RXS2719 achieves excellent low-light sensitivity, signal-to-noise ratio, full-well capacity, quantum efficiency and low-power consumption. The default mode and programmable mode of it allow a more convenient way for controlling the parameters of frame size, exposure time, gain value, and so on. It also offers the following image control functions: mirror and flip, windowing, auto black level calibration, defective pixel correction, black sun cancellation, and so forth.

RXS2719 supports high frame rate up to 30fps@1080p format through the DVP interface or MIPI interface. These prominent features integrated in RXS2719 make it become the best-in-class image sensor, and will bring users vivid pictures and excellent experience.

**Trademark Information**

OmniVision, the OmniVision logo are registered trademarks of OmniVision Technologies, Inc. All other trademarks used herein are the property of their respective owners.

Color CMOS 1080p (1920 x 1080) HD image sensor with OmniPixel3-HS™ technology  
datasheet (CSP)

PRELIMINARY SPECIFICATION

Version 1.15

December 2017

To learn more about OmniVision Technologies, visit [www.ovt.com](http://www.ovt.com).



## applications

- Security Surveillance systems
- IP cameras
- HD analog cameras

## Ordering Information

**RXS2719 (color, lead-free)  
66-pin CSP**

## features

- Support 1080p (2Mega, 1920x1080) resolution
- Support windowing
- Support mirror and flip function
- Support auto black level calibration
- Support defective pixel correction
- Support black sun cancellation
- SCCB control interface for register programming
- Support binning function
- Support 10-bit / 8-bit RAW image data output
- Support MIPI 2-lane serial output interface
- Support DVP 10-bit / 8-bit output interface
- Low power mode
- Support multi-camera synchronous function

## key specifications (typical)

- active array pixel: 1920 x 1080
- power supply:
  - core: 1.35V~1.65V (1.5V nominal)
  - analog: 2.6V~3.0V (2.8V nominal)
  - I/O: 1.7V~3.0V
- power requirements:
  - active: < 200mW
- temperature range:
  - operating: -40°C~85°C junction temperature
  - stable: -20°C~60°C junction temperature
- output interfaces: MIPI 2-lane / DVP
- output formats: RAW10 / RAW8
- lens size: 1/2.7"
- lens chief ray angle: 12°linear
- input clock frequency: 6~27 MHz
- maximum image transfer rate:
  - 1080p: 30fps
- shutter: rolling
- sensitivity: 2080mV/Lux-sec
- max S/N ratio: 39dB
- dynamic range: 76dB
- dark current: 10mV/sec@60°C
- pixel size: 3μm x 3μm
- image area: 5808 μm x 3288 μm
- Package dimension: CSP: 6961 μm x 4770 μm



**note** Power requirements specifications are estimated values and are subject to change when measured data using real silicon is available.

## Cameras Applications



### IMAGING DEVICES





## Camera Reliability Test

Reliability Inspection Item			Testing Method	Acceptance Criteria
Category		Item		
Environmental	Storage Temperature	High 60°C 96 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 96 Hours	Temperature Chamber	No Abnormal Situation
	Operation Temperature	High 60°C 24 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 24 Hours	Temperature Chamber	No Abnormal Situation
	Humidity	60°C 80% 24 Hours	Temperature Chamber	No Abnormal Situation
	Thermal Shock	High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours	Temperature Chamber	No Abnormal Situation
Physical	Drop Test (Free Falling)	Without Package 60cm	10 Times on Wood Floor	Electrically Functional
		With Package 60cm	10 Times on Wood Floor	Electrically Functional
	Vibration Test	50Hz X-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Y-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Z-Axis 2mm 30min	Vibration Table	Electrically Functional
	Cable Tensile Strength Test	Loading Weight 4 kg 60 Seconds Cycling in 24 Hours	Tensile Testing Machine	Electrically Functional
Electrical	ESD Test	Contact Discharge 2 KV	ESD Testing Machine	Electrically Functional
		Air Discharge 4 KV	ESD Testing Machine	Electrically Functional
	Aging Test	On/Off 30 Seconds Cycling in 24 Hours	Power Switch	Electrically Functional
	USB Connector	On/Off 250 Times	Plug and Unplug	Electrically Functional







## Camera Inspection Standard

Inspection Item		Inspection Method	Standard of Inspection
Category	Item		
Appearance	FPC/ PCB	Color	Major Difference is Not Allowed.
		Be Torn/Chopped	Copper Crack Exposure is Not Allowed.
		Marking	Clear, Recognizable (Within 30cm Distance)
	Holder	Scratches	The Inside Crack Exposure is Not Allowed
		Gap	Meet the Height Standard
		Screw	Make Sure Screws Are Presented (If Any)
		Damage	The Inside Crack Exposure is Not Allowed
	Lens	Scratch	No Effect On Resolution Standard
		Contamination	No Effect On Resolution Standard
		Oil Film	No Effect On Resolution Standard
		Cover Tape	No Issue On Appearance.
Function	Image	No Communication	Test Board Not Allowed
		Bright Pixel	Black Board Not Allowed In the Image Center
		Dark Pixel	White board Not Allowed In the Image Center
		Blurry	The Naked Eye Not Allowed
		No Image	The Naked Eye Not Allowed
		Vertical Line	The Naked Eye Not Allowed
		Horizontal Line	The Naked Eye Not Allowed
		Light Leakage	The Naked Eye Not Allowed
		Blinking Image	The Naked Eye Not Allowed
		Bruise	Inspection Jig Not Allowed
		Resolution	Chart Follows Outgoing Inspection Chart Standard
		Color	The Naked Eye No Issue
		Noise	The Naked Eye Not Allowed
		Corner Dark	The Naked Eye Less Than 100px By 100px
		Color Resolution	The Naked Eye No Issue
Dimension		Height	The Naked Eye Follows Approval Data Sheet
		Width	The Naked Eye Follows Approval Data Sheet
		Length	The Naked Eye Follows Approval Data Sheet
		Overall	The Naked Eye Follows Approval Data Sheet




## Company HAMPO

Dongguan Hampo Electronic Technology Co., Ltd. was established in 2015, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. Hampo is occupying 150,000 square feet automated plants with 500 employees of annual throughput 180,000,000 units cameras.

Hampo provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. Hampo specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.

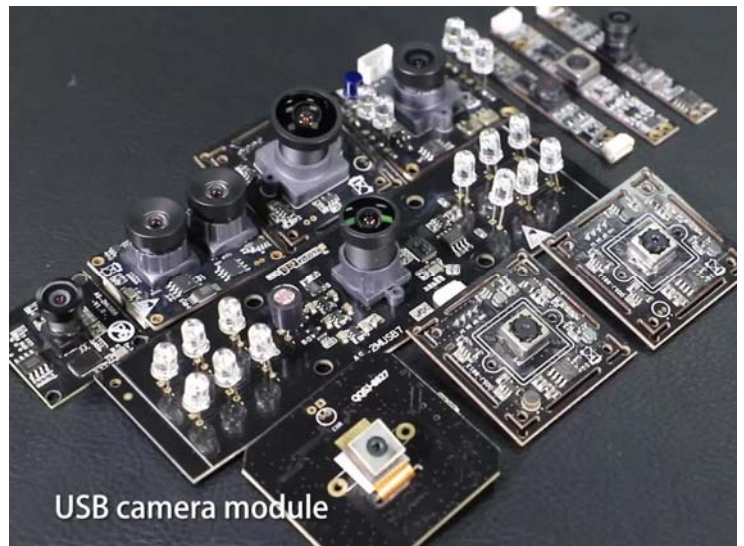

## Limited Warranty

Hampo provides the following limited warranty if you purchased the Product(s) directly from Hampo company or from Hampo's website, [www.hampotech.com](http://www.hampotech.com). Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. Hampo guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, Hampo will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of Hampo is solely limited to repair and/or replacement on the terms set forth above. Hampo is not reliable or responsible for any subsequent events.







## Hampo Strength

### Powerful Factory



### Professional Service



### Promised Delivery

